SCALE:

80/6/6

8367P POLE TOP - SHIELDED LIGHT SOURCE


Catalog No.: Description:

confidential information rty of BEGA/US.

SHOWN ON 1508HR

NOTES:

- 1. LUMINAIRE # 8367P SEE SPECIFICATIONS.
- 2. (1) 27W ELECTRONIC FLUORESCENT UNIVERSAL 120-277V BALLAST PROVIDED INSIDE LUMINAIRE.
- 3. (2) 27W CF TWIN 4-PIN LAMPS (PROVIDED BY OTHERS).
- 4. AVAILABLE IN STANDARD BEGA COLORS.

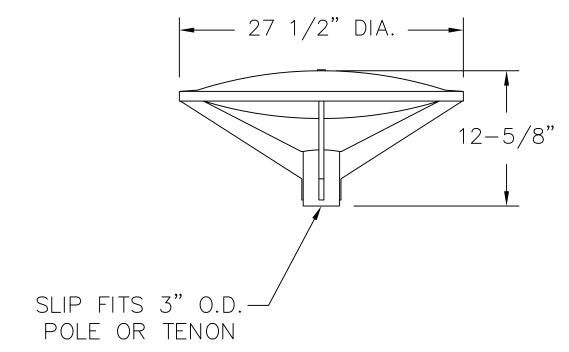

(REQUIRES A MINIMUM 3" LENGTH OF STRAIGHT DIA. POLE/TENON)

Pole top luminaires with widespread distribution

Housing/fitter: Lower slip fitter is made from a single die-cast aluminum part which includes four support arms and the lower diffuser frame. The fixture slip fits a 3" O.D. pole top or tenon and is secured by four stainless steel set screws. The top portion of the lamp housing is made from heavy gauge spun aluminum. Relamping is achieved by removing a single threaded fastener at the top of the fixture.

Enclosure: Molded 1/4" white high impact acrylic lens. Completely sealed with a high temperature silicone gasket for weather tight operation.

Electrical: Lampholders are type 2G11. Ballasts are located inside the luminaire head and are electronic, universal voltage (120V through 277V), program start with a minimum start temperature of 0°F.

Finish: Available in four standard BEGA colors: Black (BLK); White (WHT); Bronze (BRZ); Silver (SLV). To specify, add appropriate suffix to catalog number. Custom colors supplied on special order.

UL listed, suitable for wet locations. Protection class: IP65.

Weight: 26 lbs.

Effective Projection Area (EPA): 1.0 ft2

Type:
BEGA Product:
Project:
Voltage:
Color:
Options:
Modified:





 Lamp
 Lumen
 A
 B

 8367 P
 2 27W CF twin-4p
 3600
 27½
 12½